

FIG. D





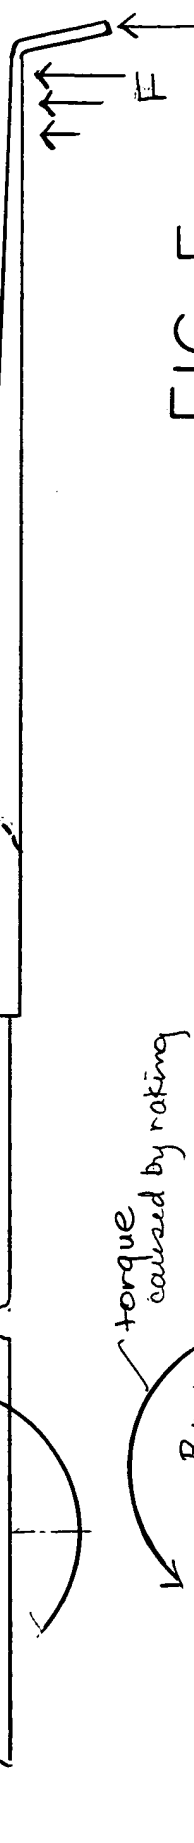


FIG. E

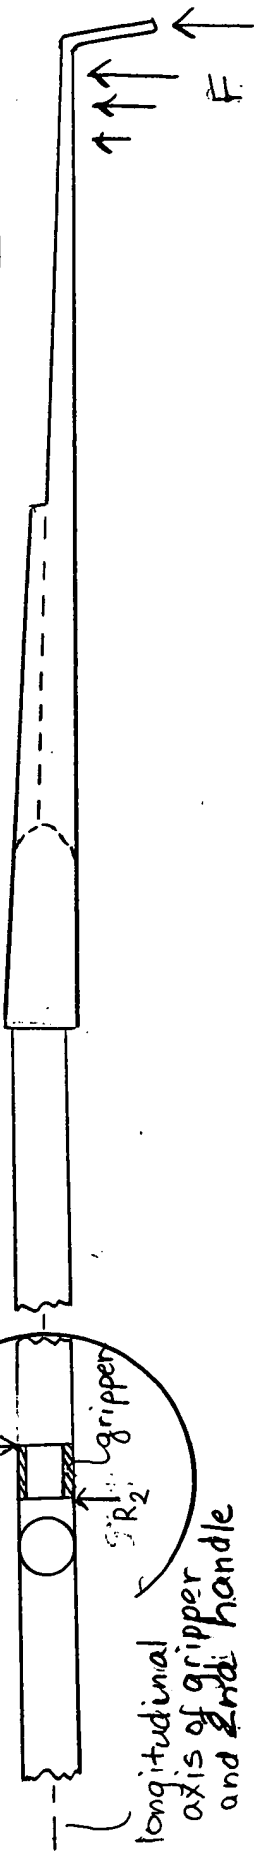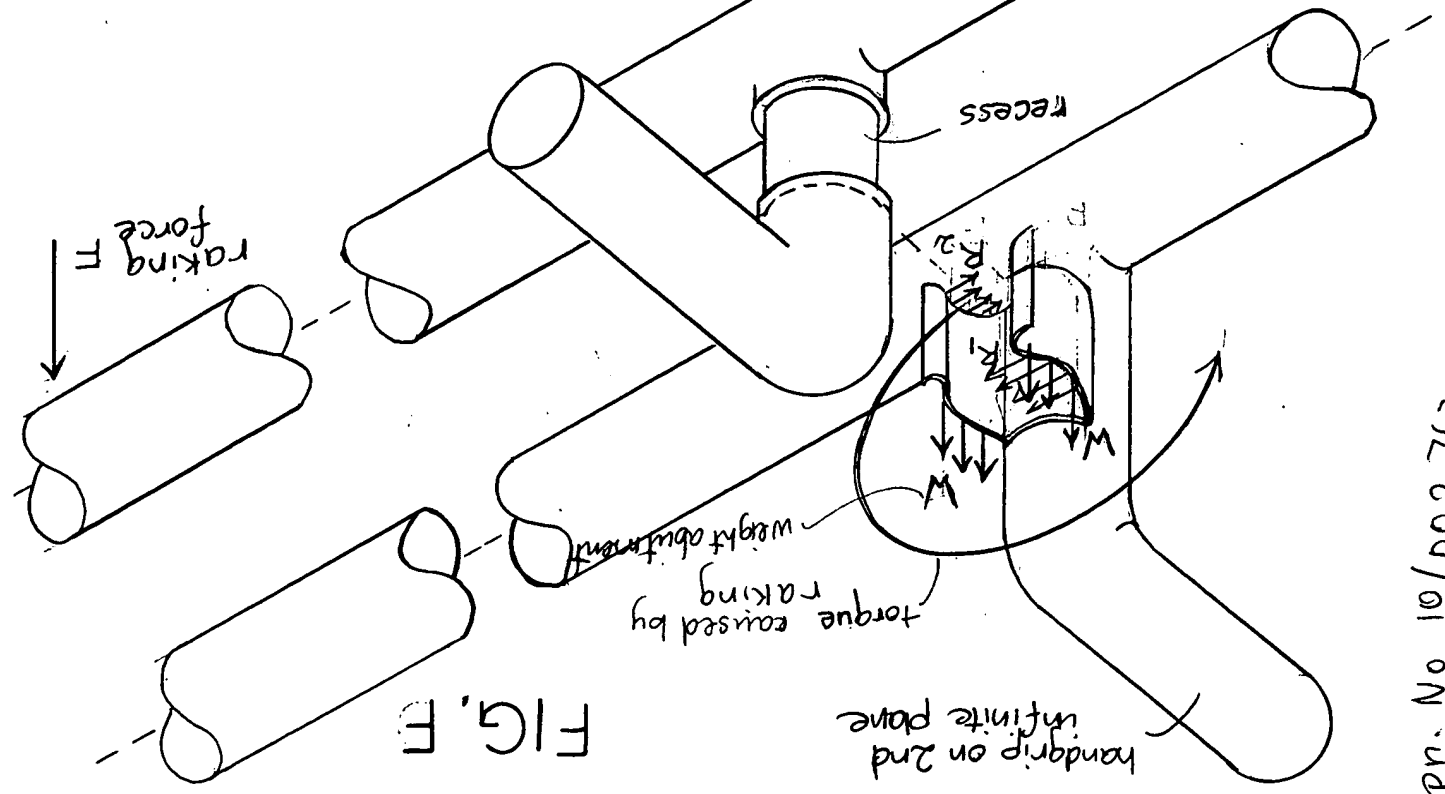

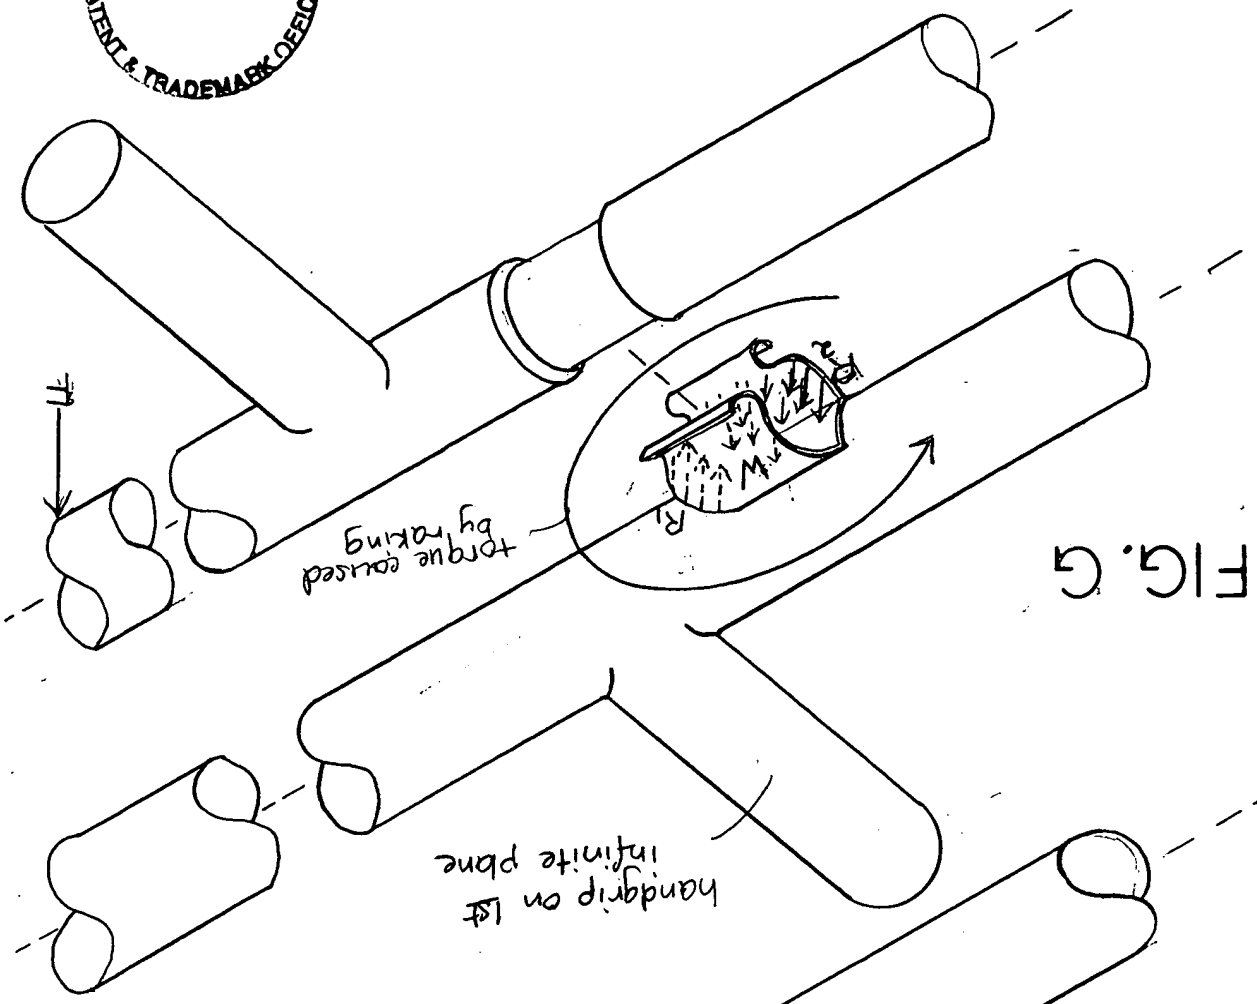

4046

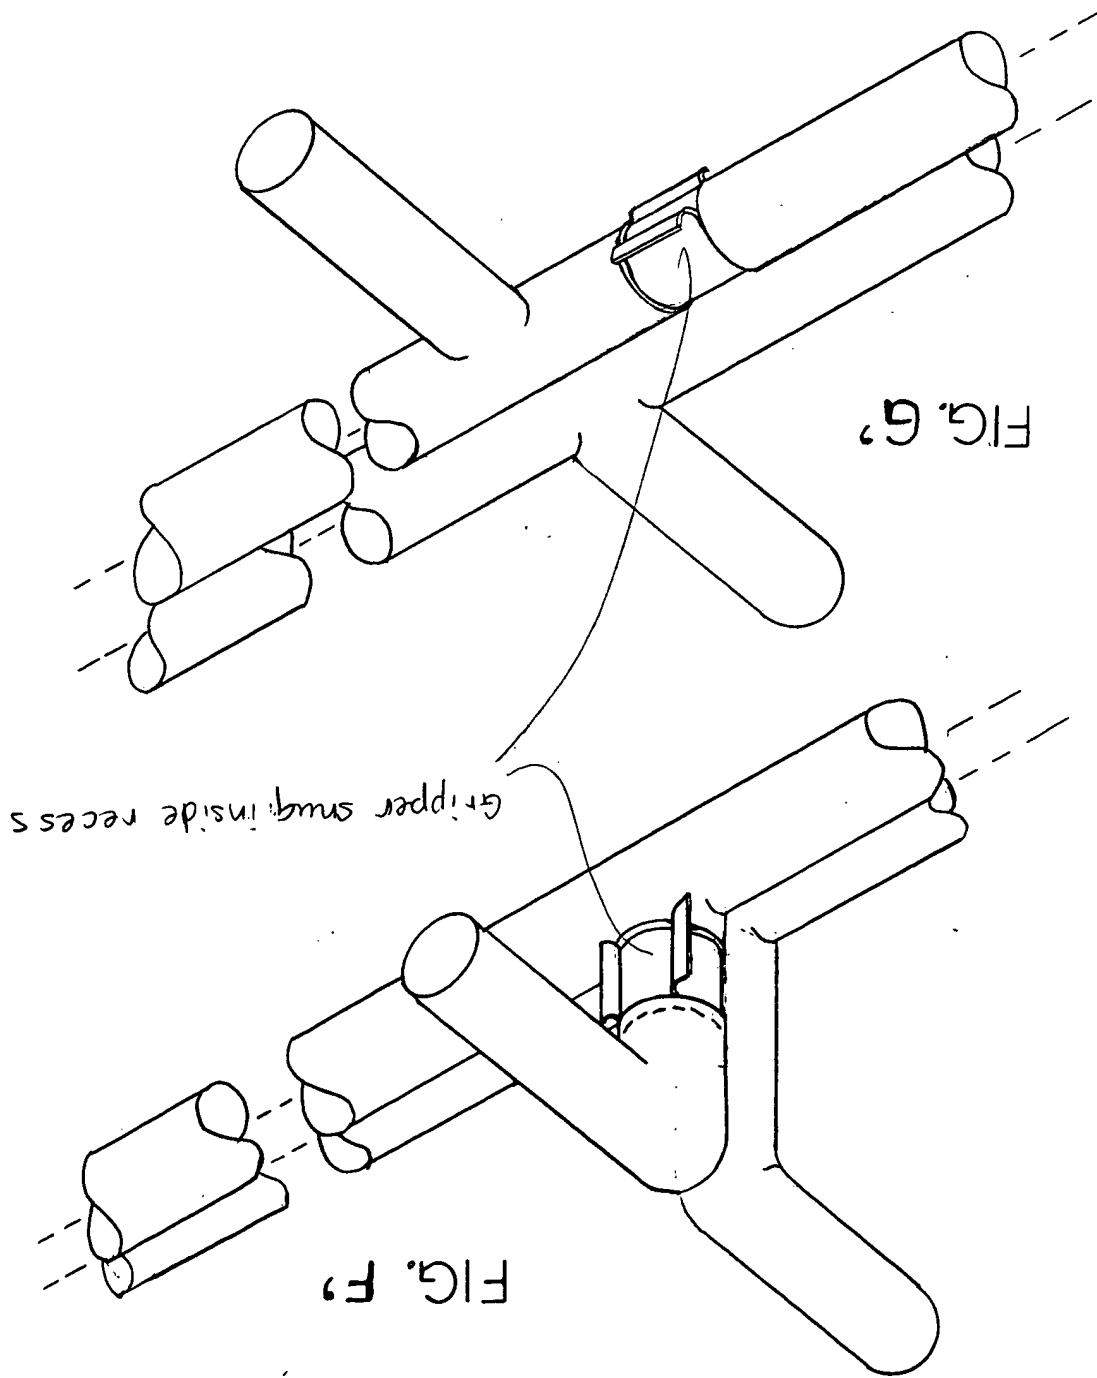

9/65

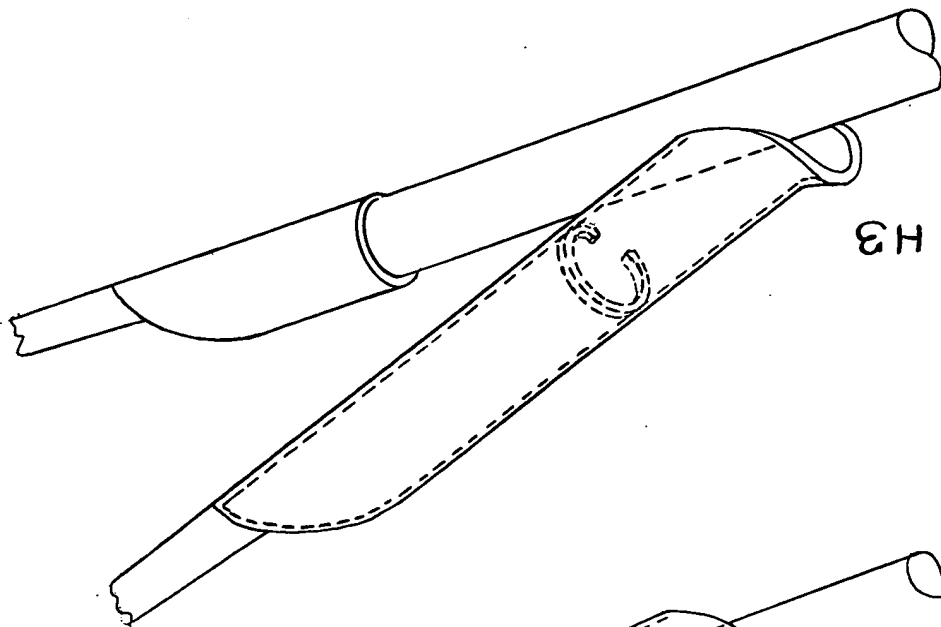


FIG. H3

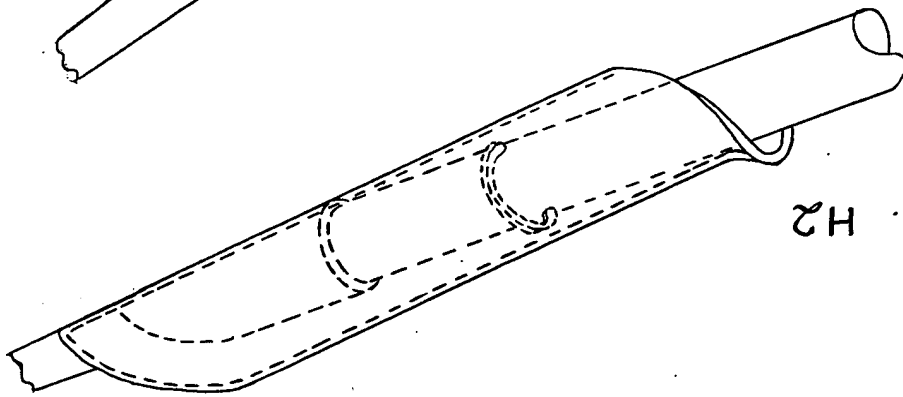


FIG. H2

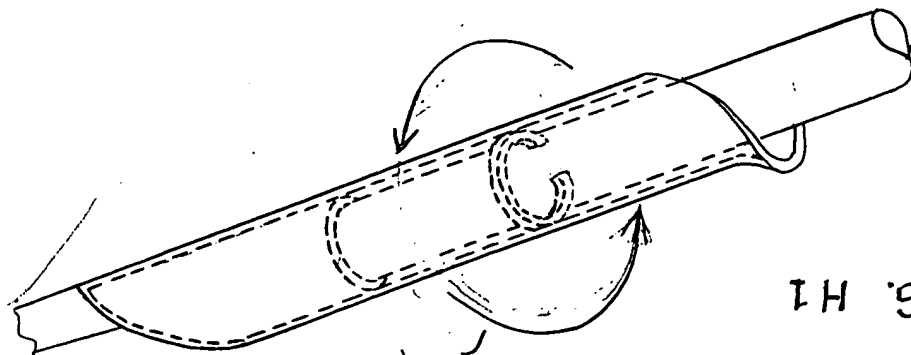


FIG. H1

torque caused by raking

Fig. I-A - Upright, no arm leverage, same grip angle  
most comfortable hold when body is in upright position


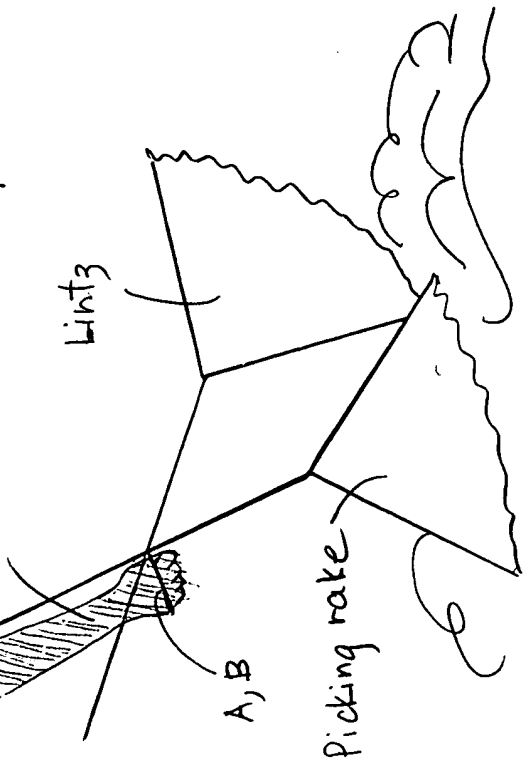


Fig. I-C  
Upright, with arm leverage aligned with that of picking rake

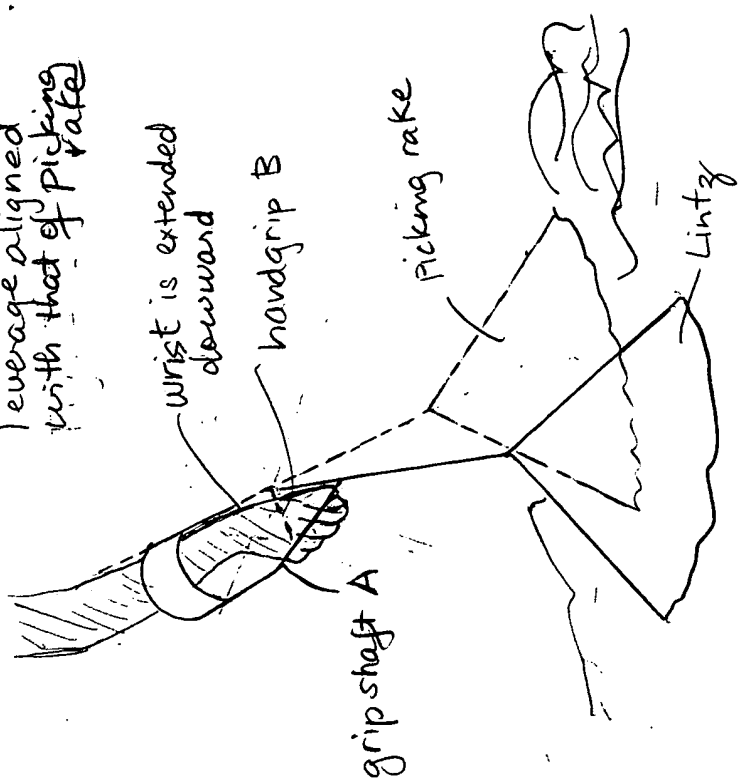

forced position of arm/hand when body is upright  
Fig. I-B - Upright with arm leverage, same grip angle

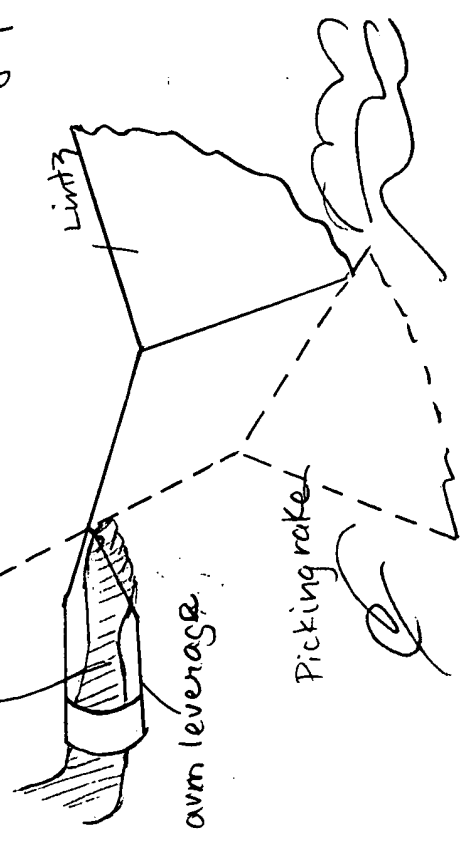


Fig. I-D - Stooped position to maintain comfortable grip

